



1. Manufacturer

Roppe Corporation
1602 N. Union Street
P.O. Box 1158
Fostoria, Ohio USA 44830-1158
t: (419) 435.8546 tf: (800) 537.9527 f: (419) 435.1056
e-mail: sales@roppe.com www.roppe.com

2. Product Description

Roppe BaseMates, a patent-pending stackable trim molding system, is made of PVC free, 100% rubber compound and forms a clean, decorative border along the wall. BaseMates allows designers to more effectively design and renovate interior spaces without disposing of the existing wall base. Comprised of fifteen (15) different components for use with any wall base – new or existing. The innovative wall base system is available in four (4) 1-1/8" shoe mold profiles and four (4) 3/4" and seven (7) 1-3/4" profile top trims.

BaseMates Top Trim:

Height: 3/4" (19.05mm) available in four profiles: B00, B01, B02 and B03

Height: 1-3/4" (44.45mm) available in profiles: C00, C01, C02, C20, C21, C22 and C23

Gauge: Nominal 1/8" (3.175mm) to 1/4" (6.35mm).

Length: 60ft (18.288m) rolls for all designs with unique identical colored divider which easily detaches generating two-60ft. pieces (120 ft. total per roll – 36.576mm).

BaseMates Base Shoe – New Installations

Styles: **A00** (straight foundation) for new installations over resilient flooring.
A01 (concaved foundation) for new installations over direct glue-down or stretched-in carpet for a smooth tucked transition look.

Height: 1-1/8" (28.58mm).

Gauge: Nominal 9/32" (7.14mm) to 5/16" (7.93mm).

Length: 60 ft. rolls (18.288m) for all designs with unique identical colored divider which easily detaches generating two- 60ft. pieces (120ft total per roll – 36.576mm).


Styles: **A02** (concaved foundation) for use on existing wall base installations over direct glue-down or stretched-in carpet for a smooth tucked transition look.
A03 (straight foundation) for use on existing wall base installations over resilient flooring

Height: 1-1/8" (28.58mm).

Gauge: Nominal 3/16" (4.78mm) to 5/16" (7.93mm).

Length: 60 ft. rolls (18.288m) for all designs with unique identical colored divider which easily detaches generating two- 60ft. pieces (120ft total per roll – 36.576mm).

Profiles:

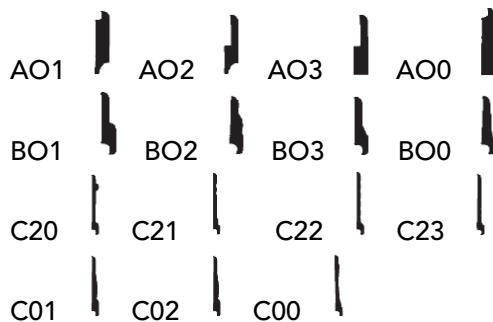

3. Technical Data

BaseMates meets Standard Specification F-1861 Type TS (Thermoset Vulcanized Rubber), Group 1 (solid) including:

- **Wear layer thickness:** min 0.002in (0.05mm) F-410
- **Flexibility:** no crack or break (1/4 in. mandrel) F-137
- **Resistance to light:** Average DE not greater than 8.0 F-1515
- **Dimensional Stability:** no more than ± 0.25% F-1861
- **Height:** as specified, ± 1% of nominal height F-1861
- **Thickness:** as specified, 0.080 in. + 0.015 to -0.005 in (2.03mm _ 0.38 mm to -0.13mm) 0.125 in + 0.015 to -0.015mm (3.18mm + 0.38mm to -0.38mm) F-386
- **Resistance to Chemicals:** no more than a slight change in surface dulling, surface attack or staining F-925.

4. Installation* (Visit roppe.com for complete Installation instructions)

All material is to be delivered to the installation location in its original packaging with labels intact. The installation area, unboxed wall base and adhesive are to be maintained between 65° (19°C) and 85° (30°C) for at least 48 hours before installation, during installation and thereafter. Proceed with the installation only when the conditions are proper and correct. Inspect all material for proper type and color. A bond test should be performed at least 72 hours prior to the scheduled installation to ensure the surface is suitable and there should be extreme difficulty in removing the wall base from the surface.

Adhesives

ROP 215 Wall Base Adhesive is an Acrylic Based Adhesive specifically formulated for the installation of Roppe's BaseMates and Rubber Corner Blocks, which provides excellent adhesion to recommended surfaces.

5. Maintenance* (Visit roppe.com for complete Maintenance instructions)

Wipe off residue with a smooth clean cloth slightly dampened with cool water, remove the water with a clean soft cloth, and allow the wall base to dry.

6. Availability and Cost

Products are available through Roppe distributors. Contact Roppe Customer Service (800) 537-9527 or visit www.roppe.com.

7. Technical Assistance

Technical service information and assistance may be obtained by calling Roppe Customer Service at 1-800-537-9527, or by visiting www.roppe.com.

Samples may be obtained by may be obtained by calling Roppe Customer Service at 1-800-537-9527, or by visiting www.roppe.com.

8. Limited Warranty

Roppe BaseMates are warranted for a period of one (1) year from date of installation to be free of defects in material and workmanship.

***For complete installation and maintenance instructions visit www.roppe.com.**

